



Camden

Color	Camden
Size	7 x 48 in
Overall Thickness	5 mm (4 mm LPT Rigid Core / 1 mm dB pad)
Wearlayer Thickness	12 mil
Textures	Deep Wood Embossed
Edge	Micro Beveled
Finish	Matte
Install	Click Edge Floating

Symbols	Test	Results
	Dimensional Tolerance Dimensional Stability Flexibility Deep Abrasion Static Load Castor Chair (100lbs) Heat Stability Light Stability Chemical Resistance Radiant Panel Smoke Density Lead Content Emissions Tests VOC Requirements	Pass Pass 128mm 21,000 cycles 0.002 (Pass) 25,000 cycles 4.5 (Pass) 4.5 (Pass) Pass >0.45 watts/CM2 <450 <0.25 ppm 0g/L (Pass) 0g/L (Pass)

Other Specification Options	
LPT Rigid Core Thickness (plus 1mm dB pad)	Wear Layer Thickness
3.2mm	8 mil
	12 mil
3.5mm	8 mil
	12 mil
4mm	8 mil
	12 mil
	20 mil
4.5mm	12 mil
	20 mil
5mm	12 mil
	20 mil
5.5mm	22 mil

Size Option		Acoustical Testing	Acoustical Results
7"x48"	1mm	18" Open Web Truss (OWT) 6" Concrete Slab	IIC: 59 / STC: 54 IIC: 52 / STC: 52


*Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. Minimum order of 15,000 SF.



Coronado

Color	Coronado
Size	7 x 48 in
Overall Thickness	5 mm (4 mm LPT Rigid Core / 1 mm dB pad)
Wearlayer Thickness	12 mil
Textures	Deep Wood Embossed
Edge	Micro Beveled
Finish	Matte
Install	Click Edge Floating

Symbols

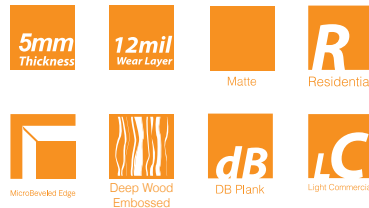

Other Specification Options

LPT Rigid Core Thickness (plus 1mm dB pad)	Wear Layer Thickness
3.2mm	8 mil
	12 mil
3.5mm	8 mil
	12 mil
4mm	8 mil
	12 mil
	20 mil
4.5mm	12 mil
	20 mil
5mm	12 mil
	20 mil
5.5mm	22 mil

Test

Dimensional Tolerance
 Dimensional Stability
 Flexibility
 Deep Abrasion
 Static Load
 Castor Chair (100lbs)
 Heat Stability
 Light Stability
 Chemical Resistance
 Radiant Panel
 Smoke Density
 Lead Content
 Emissions Tests
 VOC Requirements

Results

Pass
 Pass
 128mm
 21,000 cycles
 0.002 (Pass)
 25,000 cycles
 4.5 (Pass)
 4.5 (Pass)
 Pass
 >0.45 watts/CM2
 <450
 <0.25 ppm
 0g/L (Pass)
 0g/L (Pass)

Size Option

Acoustical Testing

Acoustical Results

7"x48"	1mm	18" Open Web Truss (OWT) 6" Concrete Slab	IIC: 59 / STC: 54 IIC: 52 / STC: 52
--------	------------	--	--


*Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. Minimum order of 15,000 SF.



Nick Papa

Color	Nick Papa
Size	7 x 48 in
Overall Thickness	5 mm (4 mm LPT Rigid Core / 1 mm dB pad)
Wearlayer Thickness	12 mil
Textures	Deep Wood Embossed
Edge	Micro Beveled
Finish	Matte
Install	Click Edge Floating

Symbols

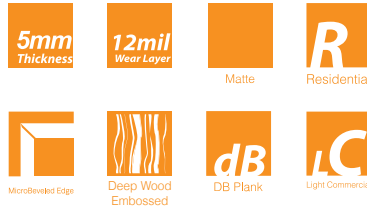

Other Specification Options

LPT Rigid Core Thickness (plus 1mm dB pad)	Wear Layer Thickness
3.2mm	8 mil
	12 mil
3.5mm	8 mil
	12 mil
4mm	8 mil
	12 mil
	20 mil
4.5mm	12 mil
	20 mil
5mm	12 mil
	20 mil
5.5mm	22 mil

Test

Dimensional Tolerance
 Dimensional Stability
 Flexibility
 Deep Abrasion
 Static Load
 Castor Chair (100lbs)
 Heat Stability
 Light Stability
 Chemical Resistance
 Radiant Panel
 Smoke Density
 Lead Content
 Emissions Tests
 VOC Requirements

Results

Pass
 Pass
 128mm
 21,000 cycles
 0.002 (Pass)
 25,000 cycles
 4.5 (Pass)
 4.5 (Pass)
 Pass
 >0.45 watts/CM2
 <450
 <0.25 ppm
 0g/L (Pass)
 0g/L (Pass)

Size Option

Acoustical Testing

Acoustical Results

7"x48"	1mm	18" Open Web Truss (OWT) 6" Concrete Slab	IIC: 59 / STC: 54 IIC: 52 / STC: 52
--------	------------	--	--

*Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. Minimum order of 15,000 SF.



Vineyard

Color	Vineyard
Size	7 x 48 in
Overall Thickness	5 mm (4 mm LPT Rigid Core / 1 mm dB pad)
Wearlayer Thickness	12 mil
Textures	Deep Wood Embossed
Edge	Micro Beveled
Finish	Matte
Install	Click Edge Floating

Symbols	Test	Results
 	Dimensional Tolerance Dimensional Stability Flexibility Deep Abrasion Static Load Castor Chair (100lbs) Heat Stability Light Stability Chemical Resistance Radiant Panel Smoke Density Lead Content Emissions Tests VOC Requirements	Pass Pass 128mm 21,000 cycles 0.002 (Pass) 25,000 cycles 4.5 (Pass) 4.5 (Pass) Pass >0.45 watts/CM2 <450 <0.25 ppm 0g/L (Pass) 0g/L (Pass)

Other Specification Options	
LPT Rigid Core Thickness (plus 1mm dB pad)	Wear Layer Thickness
3.2mm	8 mil
	12 mil
3.5mm	8 mil
	12 mil
4mm	8 mil
	12 mil
	20 mil
4.5mm	12 mil
	20 mil
5mm	12 mil
	20 mil
5.5mm	22 mil

Size Option	Acoustical Testing	Acoustical Results
7"x48"	1mm	18" Open Web Truss (OWT) 6" Concrete Slab IIC: 59 / STC: 54 IIC: 52 / STC: 52

*Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. Minimum order of 15,000 SF.