

LVT Plank



Results

(Pass)

Not detected

(Pass) / (Pass)

2.5mm / 1mm or 1.5mm / dB sound pad

Color	15 Standard, 800 Custom
Sizes	6 x 36 in, 6 x 48 in, 7 x 48 in
Overall Thickness	3.5mm (2.5mm / 1mm dB pad) 4mm (2.5mm / 1.5mm dB pad)
Wearlayer Thickness	12 mil or 20 mil
Textures	Deep Wood Embossed, Satin Wood, and Reclaimed
Edge	Micro-Beveled
Finishes	Semi Gloss or Matte with TuffCoat
Acoustical Backing	1mm or 1.5mm
Install	Glue Down

Test

Size / Squareness

Dimensional Stability

Resistance to light

Resistance to heat

Critical Radiant Flux

Workmanship, Finish

Formaldehyde


Smoke Density

Appearance

Resistance to chemicals

Thickness

Flexibility



Details

3.5mm (2.5mm / 1mm dB pad) **4mm** (2.5mm / 1.5mm dB pad)

Single Step Application / 100% Virgin Material Upgrade Wear Layer with TuffCoat

Size Options	Acoustical Testing Acoustical Results		Acoustical Results
6"x36", 6"x48", 7"x48"	1mm	18″ Open Web Truss (OWT) 6″ Concrete Slab	STC: 57 / IIC: 53 STC: 53 / IIC: 51
	1.5mm	18″ Open Web Truss (OWT) 6″ Concrete Slab	STC: 58 / IIC: 55 STC: 53 / IIC: 53






LVT Plank



2.5mm / 1mm or 1.5mm / dB sound pad

Color	15 Standard, 800 Custom	
Sizes	6 x 36 in, 6 x 48 in, 7 x 48 in	
Overall Thickness	3.5mm (2.5mm / 1mm dB pad) 4mm (2.5mm / 1.5mm dB pad)	
Wearlayer Thickness	12 mil or 20 mil	
Textures	Deep Wood Embossed, Satin Wood, and Reclaimed	
Edge	Micro-Beveled	
Finishes	Semi Gloss or Matte with TuffCoat	
Acoustical Backing	ting 1mm or 1.5mm	
Install	Glue Down	

LVT Components

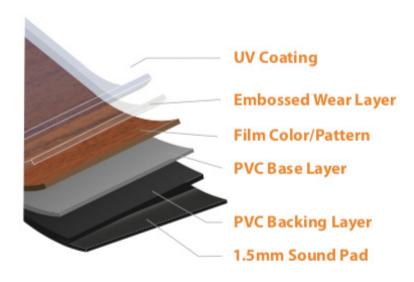

Minimum Order of 15,000 SF.





LVT Plank



4mm / Loose Lay with Integral 1mm dB pad

Color	15 Standard, 800 Custom
Size	7 x 48 in
Overall Thickness	4mm
Wearlayer Thickness	12 mil
Texture	Deep Wood Embossed
Edge	Straight
Finish	Matte
Acoustical Backing	1mm
Install	Loose Lay

Symbols	Test	Results
<image/> <image/> <image/> <image/> <image/> <image/> <image/>	Size / Squareness Thickness Flexibility Dimensional Stability Resistance to chemicals Resistance to light Resistance to heat Formaldehyde Smoke Density Critical Radiant Flux Workmanship, Finish Appearance	(Pass) / (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) Not detected (Pass) (Pass) (Pass) (Pass)
Size Options	Acoustical Testing	Acoustical Results
7″x48″	18″ Open Web Truss (OWT) 6″ Concrete Slab	STC: 58 / IIC: 54 STC: 53 / IIC: 45






LVT Plank



4mm / Loose Lay with Integral 1mm dB pad

Color	15 Standard, 800 Custom
Size	7 x 48 in
Overall Thickness	4mm
Wearlayer Thickness	12 mil
Texture	Deep Wood Embossed
Edge	Straight
Finish	Matte
Acoustical Backing	1mm
Install	Loose Lay

LVT Components

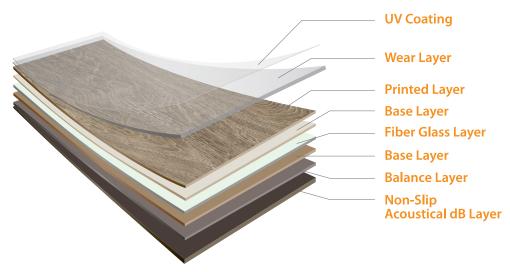

Minimum Order of 15,000 SF.







Matrix Rigid Core Click Plank



4mm / Matrix Rigid Core Click with 1mm dB sound pad

Color	15 Standard, 800 Custom
Size	7 x 48 in
Overall Thickness	5mm (4mm Matrix Rigid Core Click / 1mm dB pad)
Wearlayer Thickness	12 mil or 20 mil
Texture	Deep Wood Embossed
Edge	Micro-Beveled
Finish	Matte
Acoustical Backing	1mm
Install	Click Plank

Symbols	Test	Results
Image: Non-State state st	Size / Squareness Thickness Flatness Openings Ledging Surface Integrity Dimensional Stability Curl Resistance to chemicals Resistance to heat Resistance to light Thickness Swell Smoke Density Critical Radiant Flux	(Pass) / (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass) (Pass)
Size Options	Acoustical Testing	Acoustical Results
7″x48″	18″ Open Web Truss (OWT) 6″ Concrete Slab	STC: 59 / IIC: 54 STC: 52 / IIC: 52








Matrix Rigid Core Click Plank



4mm / Matrix Rigid Core Click with 1mm dB sound pad

Color	15 Standard, 800 Custom
Size	7 x 48 in
Overall Thickness	5mm (4mm Matrix Rigid Core Click / 1mm dB pad)
Wearlayer Thickness	12 mil or 20 mil
Texture	Deep Wood Embossed
Edge	Micro-Beveled
Finish	Matte
Acoustical Backing	1mm
Install	Click Plank

Matrix Rigid Core Click Components

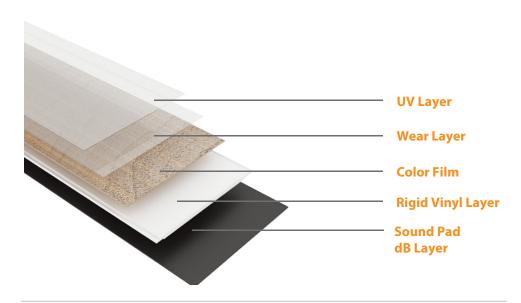

Special Sizes: 9"x48", 9"x60", & 7"x60" at an increased cost. **Minimum Order** of 15,000 SF.

