
Allegro 3D

Wood Mosaic Tile

Featured: Allegro 3D



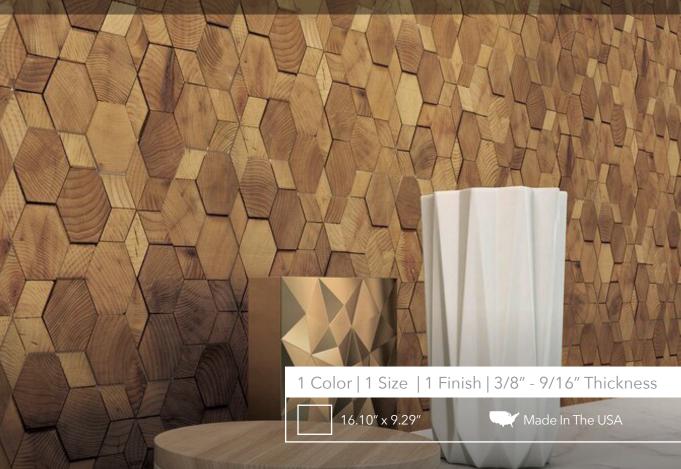

Details	Technical Specifications & Features		Packing	Pcs/Box	SF/Box	Lbs/Box
Thermally modified wood mosaic tile	Thermal Modification	Process of treating the wood with a controlled pyrolysis for 2 -3 days.	16.10" x 9.29"	10pc	10.4 SF	12 Lbs
Sheet Size: 16.10" x 9.29"	Fire Resistance	Through the Thermal Process, the wood's molecular structure is modified; all the organic compounds and water retained in the wood is removed.	Format			
Thickness: 3/8"						
Grout free with 1mm gap between chips						
UV Clear Coat		Class C3	-27-			
Mesh Mounted		May be installed on a wall near electric fireplace with a temperature not to exceed 210°F.	Symbols			
Benefits		Not recommended for installation on a wall near wood burning fireplace or stove.				
	Durability Recommended Adhesives	Class 1-3 EN 350-2				
 Durable Resistant to micro-organisms and insects 		Mapei Ultrabond ECO GPT Mapei ECO 985 Boston Best Adhesive - Bond Hardwood Liquid Nails Heavy Duty - Construction Adhesive Loctite PL Premium Polyurethane Weldwood Contact Cement - Construction Adhesive For a more uniform result, use a brown color adhesive. Warm soapy water. Avoid chemical and abrasive products.				
 Up to 90% reduced shrinking and swelling 						
 Environmentally friendly No chemical staining 			Wall Tile Residential Commercial Natural			
 100% sourced in North America using sustainable harvesting 						
• Handmade in the USA						