


Lento

Wood Mosaic Tile

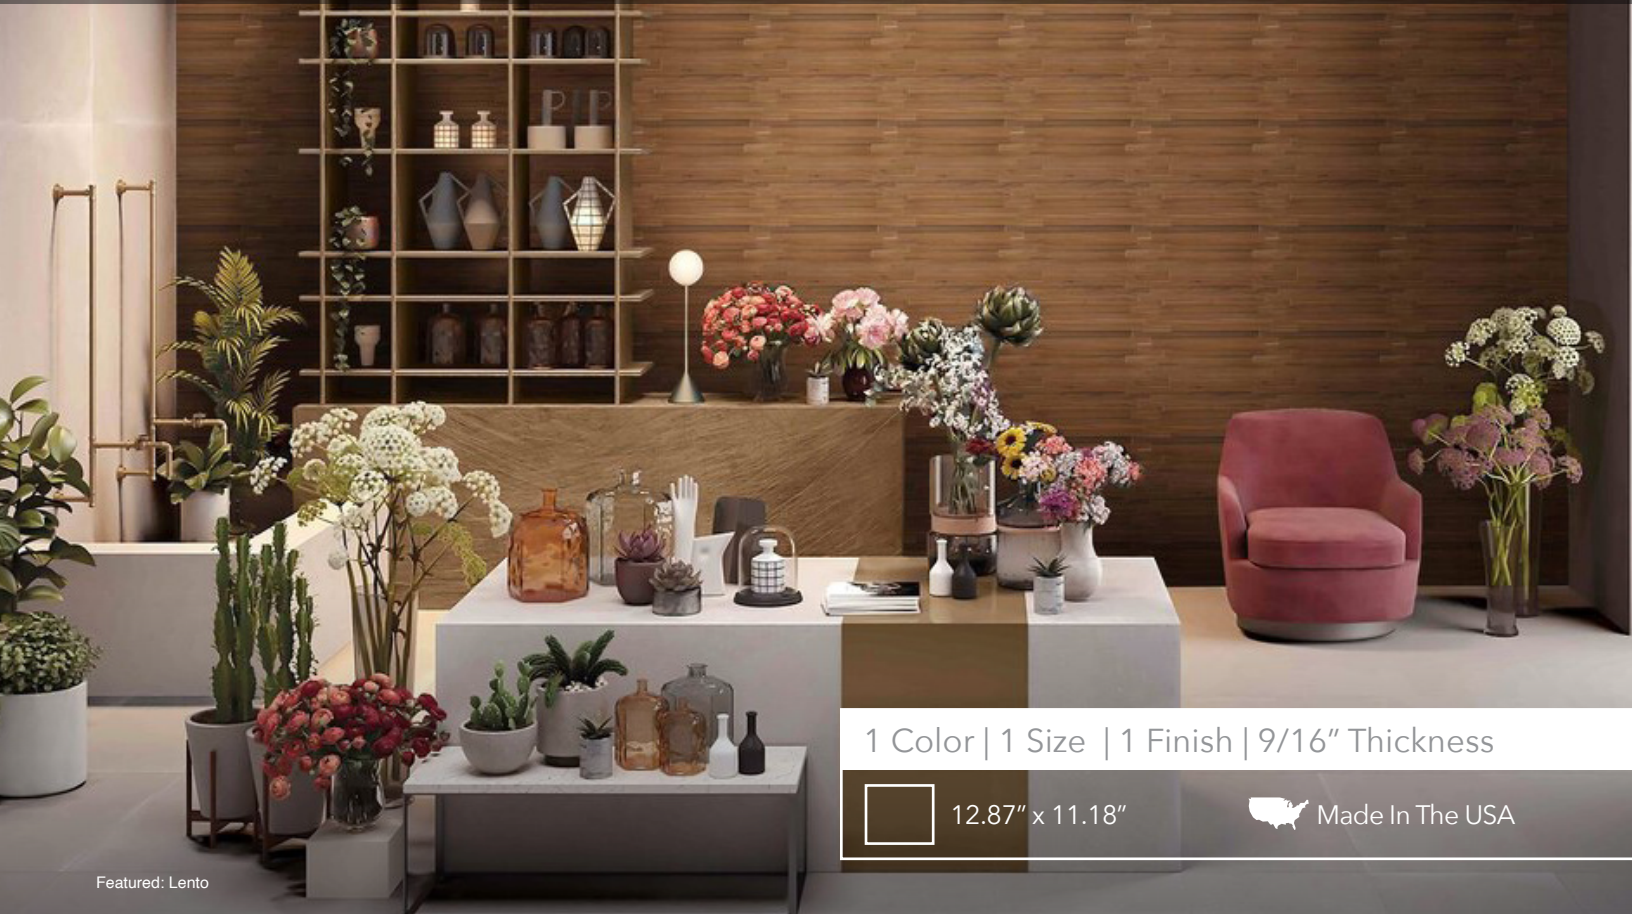

1 Color | 1 Size | 1 Finish | 9/16" Thickness

12.87" x 11.18"

Made In The USA

Featured: Lento

Details	Technical Specifications & Features		Packing	Pcs/Box	SF/Box	Lbs/Box
<p>Thermally modified wood mosaic tile</p> <p>Sheet Size: 12.87" x 11.18"</p> <p>Thickness: 9/16"</p> <p>Grout free with 1mm gap between chips</p> <p>UV Clear Coat</p> <p>Mesh Mounted</p>	<p>Thermal Modification</p> <p>Process of treating the wood with a controlled pyrolysis for 2 -3 days.</p>	<p>Through the Thermal Process, the wood's molecular structure is modified; all the organic compounds and water retained in the wood is removed.</p>	12.87" x 11.18"	10 Pcs	9.9 SF	10 Lbs
	<p>Fire Resistance</p> <p>Class C3</p> <p>May be installed on a wall near electric fireplace with a temperature not to exceed 210°F.</p> <p>Not recommended for installation on a wall near wood burning fireplace or stove.</p>		<p>Format</p> <p>Natural Wood</p>			
<p>Benefits</p> <ul style="list-style-type: none"> • Durable • Resistant to micro-organisms and insects • Up to 90% reduced shrinking and swelling • Environmentally friendly No chemical staining • 100% sourced in North America using sustainable harvesting • Handmade in the USA 	<p>Durability</p> <p>Class 1-3 EN 350-2</p>		<p>Symbols</p> <p>Wall Tile Residential Commercial Natural</p>			
	<p>Recommended Adhesives</p> <p>Mapei Ultrabond ECO GPT Mapei ECO 985 Boston Best Adhesive - Bond Hardwood Liquid Nails Heavy Duty - Construction Adhesive Loctite PL Premium Polyurethane Weldwood Contact Cement - Construction Adhesive</p> <p>For a more uniform result, use a brown color adhesive.</p>					
	<p>Cleaning</p> <p>Warm soapy water. Avoid chemical and abrasive products.</p>					