
Pianissimo

Wood Mosaic Tile





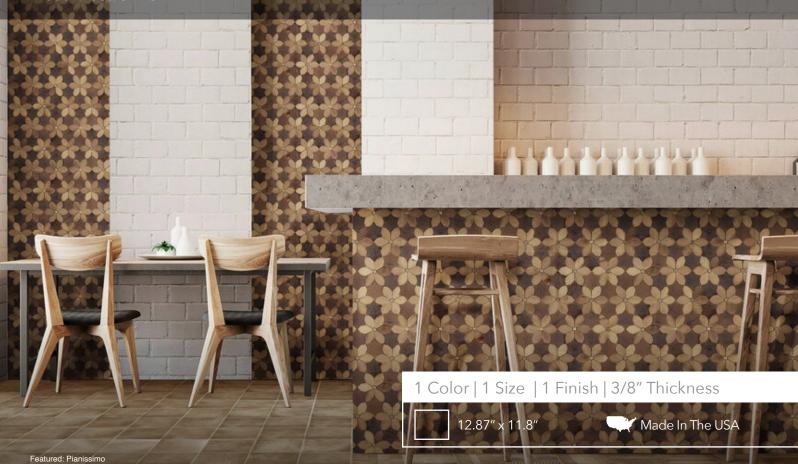

Dotaile	
Detalls	

Technical Specifications & Features

Thermally modified wood mosaic tile	Thermal Modification	Process of treating the wood with a controlled pyrolysis for 2 -3 days.
Sheet Size: 12.87" x 11.8"		Through the Thermal Process, the wood's
Thickness: 3/8"		molecular structure is modified; all the organic
Grout free with 1mm gap between chips		compounds and water retained in the wood is removed.
UV Clear Coat	Fire Resistance	Class C3
Mesh Mounted		May be installed on a wall near electric fireplace with a temperature not to exceed 210°F.
Benefits		Not recommended for installation on a wall near wood burning fireplace or stove.
	Durability	Class 1-3 EN 350-2
• Durable	Recommended Adhesives	Mapei Ultrabond ECO GPT
 Resistant to micro-organisms and insects 		Mapei ECO 985
• Up to 90% reduced shrinking and swelling		Boston Best Adhesive - Bond Hardwood Liquid Nails Heavy Duty - Construction Adhesive Loctite PL Premium Polyurethane
 Environmentally friendly 		Weldwood Contact Cement - Construction Adhesive
No chemical staining		For a more uniform result, use a brown color
• 100% sourced in North		adhesive.
America using sustainable harvesting	Cleaning	Warm soapy water. Avoid chemical and abrasive products.
 Handmade in the USA 		products.



Format



Natural Wood

Symbols

