


# Crackle & Pop

Wall Tile

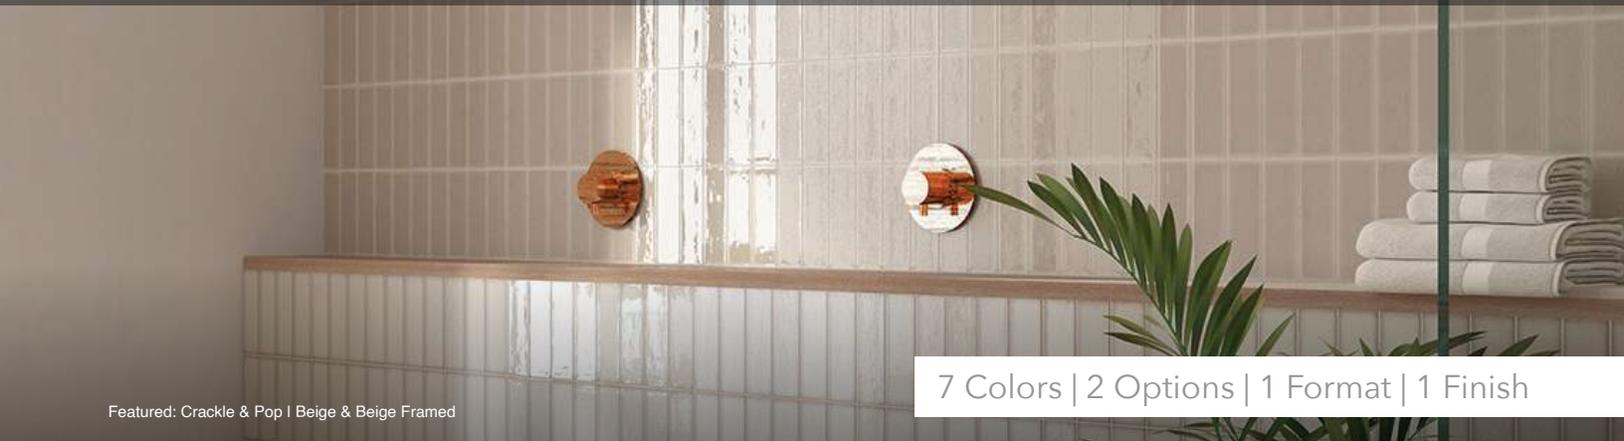

Featured: Crackle & Pop I Beige & Beige Framed

7 Colors | 2 Options | 1 Format | 1 Finish


## Details

### Size

2.6" x 7.9"  
Matte Finish  
Pressed

**Installation Recommendation:**  
Choose a grout color that closely matches the tile.

## Colors

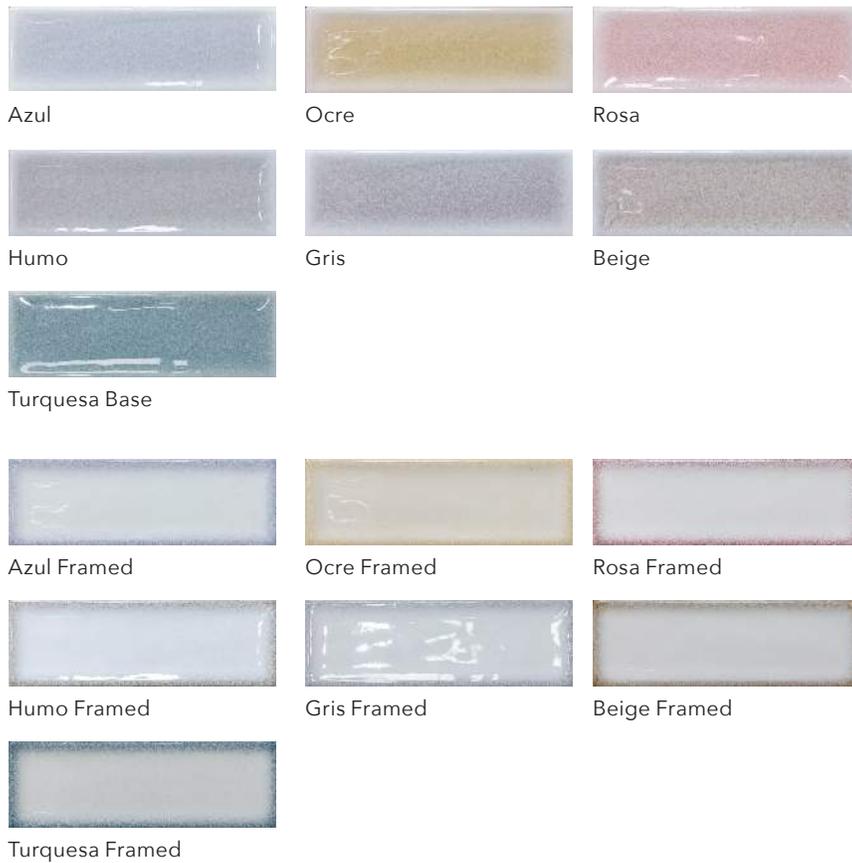

## Symbols



## Packing

2.6" x 7.9"      Pcs/Box: 26pcs      SF/Box: 3.88 SF      Lbs/Box: 14.77 Lbs

# Crackle & Pop (continued)



## TECHNICAL INFORMATION

		<i>Method</i>	<i>Minimal Requirements</i>	<i>Results</i>
Dimensions		ISO10545-2	LENGTH±0.6% (max.±2.0mm)	65
			WIDTH±0.6% (max.±2.0mm)	200
			THICKNESS±0.5mm	9.5
Water Absorption		ISO10545-3	0.5%<E≤3%	1.42
Breaking Strength in N (Thickness ≥7.5mm)		ISO10545-4	1100	1593
Modulus of rupture N/mm <sup>2</sup>		ISO10545-4	30	48
Frost Resistance		ISO10545-12	PERFORM	PERFORM
Thermal Shock		ISO10545-9	PERFORM	PERFORM
Chemical Resistance				
a) Acids	H	ISO10545-13	DECLARED VALUE	GHA
	L		DECLARED VALUE	GLA
b) Alkalis	H		DECLARED VALUE	GHA
	L		DECLARED VALUE	GLA
c) Household products and salts for swimming pools.			GB	GA
Stains		ISO10545-14	3	5