

Mantanzas

Porcelain Tile



Featured: Mantanzas I Light Grey

Stocked In The USA
2-3 week lead time

4 Colors | 9 Formats | 1 Finish

Details

Sizes



12" x 24"



24" x 24"



24" x 48"

Additional Formats



(2" x 2")
11.75" x 11.75"
Mosaic



(3")
10.25" x 11.75"
Hex Mosaic




9.74" x 11.37"
3D Hex Mosaic



(4")
13.6" x 11.2"
Craft Hex



14.5" x 13.7"
Sphere Mosaic



4" x 12"
Bullnose

3/8" Thickness

Installation Recommendations:

- 1/8" minimum recommended grout joint (Rectified).
- Choose a grout color that closely matches the tile.

Colors




White
Matte
Rectified



Light Grey
Matte
Rectified



Beige
Matte
Rectified

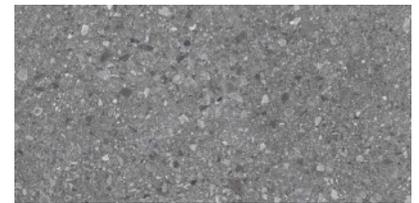

Dark Grey
Matte
Rectified

Symbols



Floor & Wall



Residential



Commercial



Multi-Family



Matte



Rectified



Shade Variation

Packing

Pcs/Box

SF/Box

Lbs/Box

12" x 24"

8pcs

15.38 SF

66.81 Lbs

24" x 24"

4pcs

15.46 SF

67 Lbs

24" x 48"

2pcs

15.49 SF

67 Lbs

(2" x 2") 11.75" x 11.75" Mosaic

10pcs

9.68 SF

38 Lbs

(3") 10.25" x 11.75" Hex Mosaic

5pcs

4.20 SF

18 Lbs

9.74" x 11.37" 3D Hex Mosaic

5pcs

2.64 SF

6.40 Lbs

(4") 13.6" x 11.2" Craft Hex

5pcs

4.09 SF

17 Lbs

14.5" x 13.7" Sphere Mosaic

5pcs

6.07 SF

19 Lbs

4" x 12" Bullnose

15pcs

4.64 SF

18 Lbs

Mantanzas (continued)



TECHNICAL INFORMATION

Dynamic Coefficient of Friction (DCOF)	≥0.42
Breaking Strength	≥425 lbs.
MOHs	7.0
Water Absorption	≤0.5%
Chemical Resistance	Class A
Abrasion Resistance	Class IV
ANSI Classification	IW
Thermal Shock Resistant	Resistant
Frost Resistance	Resistant