

Trinity

Ceramic Tile




Featured: Trinity I Silver

Stocked In The USA
2-3 week lead time

2 Colors | 1 Size | 1 Finish

Details

Size




12" x 24"
5/16" Thickness
Matte Finish
Pressed

Installation Recommendations:

- For 12" x 24" pressed tiles: 1/8" grout joint and 33% offset pattern recommended.
- We recommend choosing a grout color that closely matches the tile.

Colors

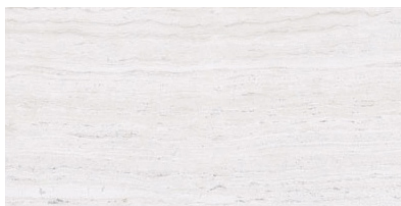


Silver



Natural

Symbols

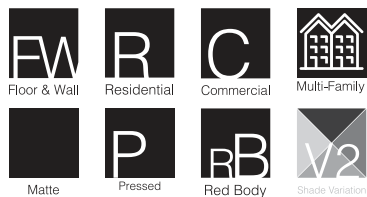

Packing

Pcs/Box

SF/Box

Lbs/Box

12" x 24"

10pcs

19.38 SF

70.08 Lbs

TECHNICAL INFORMATION

Dimensions / Surface flatness

Warpage Diagonal	ASTM C499	26.4 ± 0.5%
Warpage Edge	ASTM C499	23.6 ± 0.5%

Physical properties

Water Absorption	ASTM C373	3 < wa ≤ 7.0
Breaking Strength	ASTM C648	≥ 250 Lbf
Visible Abrasion Resistance	ASTM C1027	PEI (IV)
Thermal Shock Resistance	ASTM C484	Resistant
Crazing Resistance	ASTM C424	Resistant
Frost Resistance	ASTM C1026	Resistant
Dynamic Coefficient of Friction (DCOF)	ANSI A 137-1 Section 9,6	≥ 0.42

Chemical properties

Chemical Resistance	ASTM C650	Class A ¹ Resist
Stain Resistance	ASTM C1378	Class A

¹Avoid contact of the ceramic material with chemicals such as Muriatic Acid, Hydrofluoric Acid, Chlorine, Gasoline, Thinner, Diesel, cleaners that contain Potassium Hydroxide and other similar products, since the use of such substances can cause severe changes in the tile surface, altering its original appearance.