

Chantilly

Porcelain Tile



Produced In The USA
2-3 week lead time

3 Colors | 3 Formats | 1 Finish

Featured: Chantilly | Lagoon Deco Mosaic | Saddle

Details

Sizes



12" x 70"

Additional Formats



12" x 31" Lanai Deco Chevron



16" x 16" Lagoon Deco Mosaic

5/16" Thickness
Matte Finish
Rectified

Installation Recommendation:
Choose a grout color that closely matches the tile.

Colors



Natural



Honey



Saddle

Symbols



Floor Tile



Residential



Commercial



Multi-Family



Matte



Rectified



Shade Variation

Packing

12" x 70"
12" x 31" Lanai Deco Chevron
16" x 16" Lagoon Deco Mosaic Sheet

Pcs/Box

3pcs
6pcs
5pcs

SF/Box

17.11 SF
15.36 SF
5 SF

Lbs/Box

65.58 Lbs
54.72 Lbs
34.41 Lbs

Chantilly (continued)



TECHNICAL INFORMATION

THIS PRODUCT MEETS OR EXCEEDS ALL STANDARDS DESCRIBED IN ANSI A137.1 & A137.3.


<i>Specs</i>	<i>Test Method</i>	<i>Industry Standard</i>	<i>Values</i>	
Water Absorption	ASTM C373	≤0.5%	≤0.5%	
Surface Wear Resistance	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
Chemical Resistance	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
DCOF AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET (MATTE SURFACES)	
		OUTDOOR >0.55 WET	>0.55 WET (2CM & GRIP)	
Stain Resistance	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
Breaking Strength Gauged Porcelain 6mm	ASTM C1505	≥175 lbf	≥200 lbf	
Breaking Strength	ASTM C648	≥275 lbf	≥300 lbf	
Breaking Strength Outdoor 2cm	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
Resistance to Freeze	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
Warpage Edge	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
Warpage Diagonal	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
Wedging	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
Warpage Edge	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Pressed
Warpage Diagonal	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Pressed
Wedging	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Pressed
Thickness Gauged Porcelain	ASTM C499	Range: ± 0.02 in	≤0.02 in	
Thickness	ASTM C499	Range: ± 0.04 in	≤0.04 in	
Length / Width Variation	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs

Chantilly (continued)




12" x 70" PHOTOS

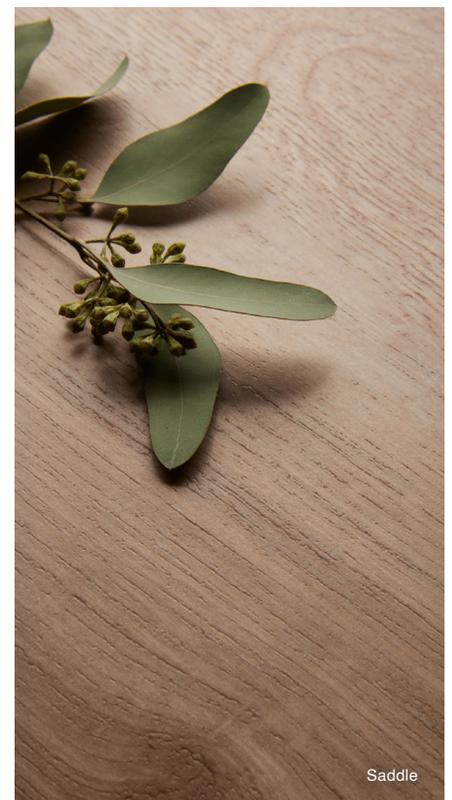

Chantilly (continued)



LANAI DECO PHOTOS

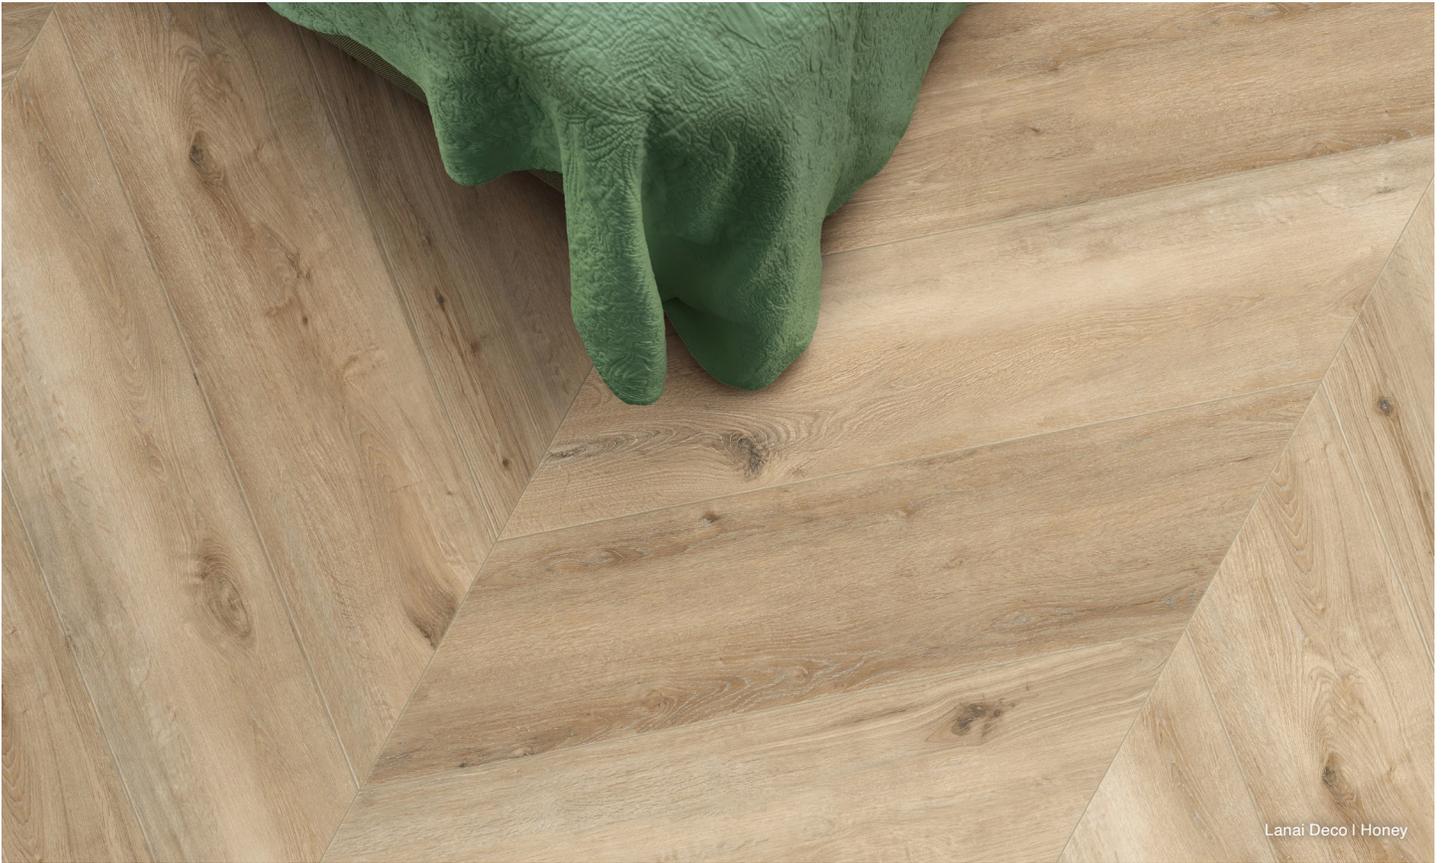

Lanai Deco | Honey



Lanai Deco | Natural



Lanai Deco | Saddle

Chantilly (continued)



LAGOON DECO PHOTOS

