


Tempo



INTERNATIONAL
BUILDERS SUPPLY

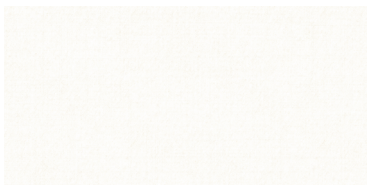

White



Beige



Grey



Black*

*Non-stock Color

12" x 24"

Matte

Porcelain Tile

Floor & Wall

Pcs per Box: 8

Lbs per Box: 56.22

Boxes per pallet: 48

SF per Box: 15.07

Tempo



INTERNATIONAL
BUILDERS SUPPLY

Technical Characteristics	ISO	Required	Unit	Tempo
Tile size variation in relation to W	10545-2	+/-0.60	%	+/-0.60
Tile size variation in relation to M	10545-2	+/-0.50	%	+/-0.25
Thickness variation	10545-2	+/-5.0	%	+/-5.0
Straightness of the sides	10545-2	+/-0.50	%	+0.1/-0.3
Deviation from orthogonality	10545-2	+/-0.60	%	+/-0.4
Central diagonal curvature deviation	10545-2	+/-0.50	%	+0.3/-0.1
Deviation of the curvature of the sides	10545-2	+/-0.50	%	+0.3/-0.1
Bending over diagonal	10545-2	+/-0.50	%	+/-0.30
Quality of surface	10545-2	>=95	%	>=95
Water absorption	10545-3	<=0.5	%	<=0.5
Resistance to bending	10545-4	>=35	N/mm ²	>=40
Breaking strength	10545-4	>=1300	N	>=1500
Class of Use *	10545-7	Specify	USE	5
Linear expansion coefficient x 10 ⁻⁶	10545-8	-	C-1	6.3 a 7.0
Moisture expansion	10545-10	-	mm/m	<=0.6
Grazing resistance	10545-11	Required	-	OK
Resistance to chemicals	10545-13	Min.Class GB	-	GA
Resistance attacks acid/alkaline	10545-13	Specify	-	GLB
Surface resistance to stains	10545-14	Min.Class 3	-	Min.Class 3
Dynamic Coefficient of Friction	ASTM1028	Specify	-	Pass
Changes in hue				V3