


Fusion

Wall



INTERNATIONAL
BUILDERS SUPPLY

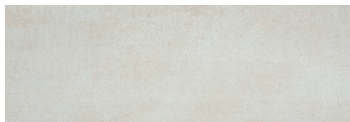

Fusion Cloud
12"x36"



Fusion Dec Cloud
12"x36"



Fusion Iron
12"x36"



Fusion Dec Iron
12"x36"



Fusion Desert
12"x36"



Fusion Dec Desert
12"x36"

Matte
Wall Tile
White Body

Fusion

Wall



INTERNATIONAL
BUILDERS SUPPLY

Technical Characteristics	ISO	Standard	River
Thickness Variation	10545-2		10.2mm ± 0.50mm
Straightness of Sides	10545-2		± 0.07%
Orthogonality	10545-2		± 0.07%
Curvature	10545-2		Short: CC: -0.06% CV: +0.12% Long: CC: -0.06% CV: +0.12%
Water Absorption	10545-3	> 10%	Passed
Breaking Strength	10545-4	≥ 600N	Passed
Modulus of Rupture	10545-4	≥ 12 N/mm ²	Passed
Lineal Thermal Expansion	10545-8	Max 9x10 ⁻⁶ K ⁻¹	6.5x10 ⁻⁶ K ⁻¹
Thermal Resistance	10545-9		Resistant
Crazing Resistance	10545-11	Demanded	Resistant

Acids and Bases	Weak Strong	10545-13		GLA GHA
Cleaning Products and Pool Reactive Agents			Min GB	GA
Resistance to Stains		10545-14	Required	Class 5

Size	Thickness	Sqf/Box	Pieces/Box	Lbs/Box
12"x36"	11mm	11.625	4	41.446