

Munich

Porcelain Tile



Stocked In The USA
2-3 week lead time

2 Colors | 1 Size | 1 Finish

Featured: Munich I Natural (Floor)

Details

Size



12" x 24"
5/16" Thickness
Matte
Pressed


Installation Recommendations:

- For 12" x 24" pressed tiles: 1/8" grout joint and 33% offset pattern recommended.
- We recommend choosing a grout color that closely matches the tile.

Colors



Natural

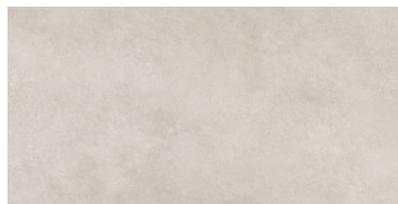

Greige

Symbols



Packing

12" x 24"

Pcs/Box

9pcs

SF/Box

17.44 SF

Lbs/Box

64.46 Lbs

Munich (continued)



TECHNICAL INFORMATION

Dimensions | Surface flatness

Warpage Diagonal	ASTM C485	26.4 ± 0.5% in
Warpage Edge	ASTM C485	23.6 ± 0.6% in

Physical properties

Water Absorption	ASTM C373	≤ 0.5%
Warpage Strength	ASTM C648	≥ 275 lbf
Visible Abrasion Resistance	ASTM C1027	PEI (IV)
Thermal Shock Resistance	ASTM C484	Resistant
Crazing Resistance	ASTM C424	Resistant
Frost Resistance	ASTM C1026	Resistant
Dynamic Coefficient of Friction (DCOF)	ANSI A326.3	≥ 0.42

Chemical properties

Chemical Resistance	ASTM C650	Class A ¹
Stain resistance	ASTM C1378	Class A

¹Avoid contact of the ceramic material with chemicals such as Muriatic Acid, Hydrofluoric Acid, Chlorine, Gasoline, Thinner, Diesel, cleaners that contain Potassium Hydroxide and other similar products, since the use of such substances can cause severe changes in the tile surface, altering its original appearance.